
# EW70 Opening Window System

Designed to meet the market needs EW70 is a high thermally efficient windows system offering very good level of functionality and quality. The EW70 profiles respect the modern narrow lines, high stability and loading capacity requirements.



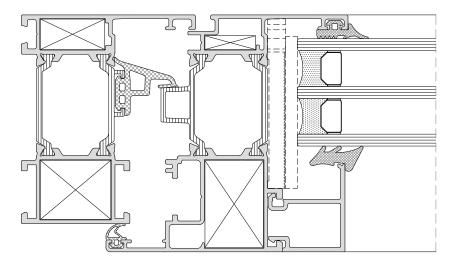

#### **Technical features**

Elegant straight design Variety of profiles Double & triple glazing option Glazing infill range: 17 ÷ 52 mm Fixed frame (min. depth): 70 mm Vent leaf (min. depth): 79.5 mm

#### Hardware accessories

Eurogroove & PVC groove Max. leaf weight: 130 kg

#### **Performance**

Air Permeability:	Class 4
Watertightness:	up to <b>Class 9A</b>
Resistance to wind load:	Class C4
Impact Resistance:	Class 4
Thermal transmittance $(U_f)$ :	from <b>1.4 W/(m²K)</b>
Operating forces:	Class 1
Mechanical properties:	Class 2

## **Surface treatment options**

RAL colours ETEM colours Anodising Wood effects Quality Standards: - QUALICOAT - OUALIDECO - QUALANOD

### **Typologies**

- Turn, tilt & turn, tilt, fixed, door-height window
- Inward opening
- Single & double leaf
















#### **Production certificates**

- EN ISO 9001
- EN ISO 14001
- OHSAS 18001



